


STANDARD 13X POWDER

MOLECULAR SIEVE

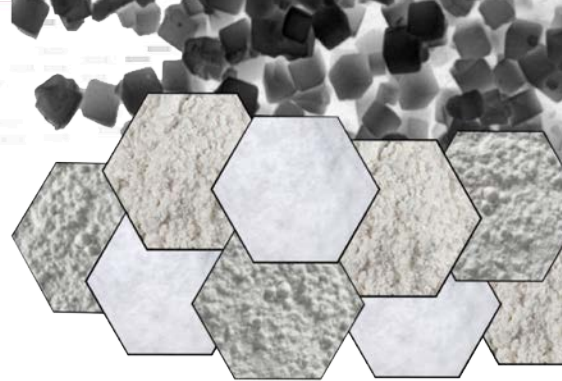


DESCRIPTION

Standard 13X Powder is manufactured to control the presence of moisture and other contaminants in adsorbent matrices. The addition of 13X powder to polymer mixtures can help reduce bubble formation and decrease warping in applications such as insulating glass. This molecular sieve offers a high adsorption capacity for both static and dynamic adsorption processes.

- used to create adsorbent matrices in polymer mixtures
- capable of removing a wide range of contaminants to protect polymers
- extends the lifespan of polymer mixtures
- offers advantageous adsorption capacity in static and dynamic applications

CHEMICAL FORMULA



SPECIFICATIONS

Molecular Sieve		
Standard 13X Powder		
Property	Unit	Powder
Particle Size	µm	2.0 - 4.0
Bulk Density	g/mL (lb/ft ³)	≥0.40 (≥25)
Static Water Adsorption	wt%	≥28
pH	-	≤11.8
Moisture Content	wt%	≤2.5
Packaging Options	700kg (1,543.2lb) / Super Sack; 90kg (198.4lb) / Drum; 15kg (33.1lb) / Carton	

INDUSTRIES USED

- | | | |
|-----------------|------------------|------------------|
| coatings | cosmetics | food industry |
| glue | insulating glass | paint |
| pharmaceuticals | plastic | polymer mixtures |
| refrigerants | rubber | sealants |

STORAGE

As an adsorbent, molecular sieve should not be left exposed to open air and should be stored in dry conditions with air-proof packaging.

CONNECT WITH US...

Hengye Inc.
 11999 Katy Frwy, Suite 588
 Houston, Texas 77079
Office (832) 288-4288
Fax (832) 288-4230
 info@hengyeinc.com

