


# STANDARD ACTIVATED ALUMINA POWDER

## ACTIVATED ALUMINA

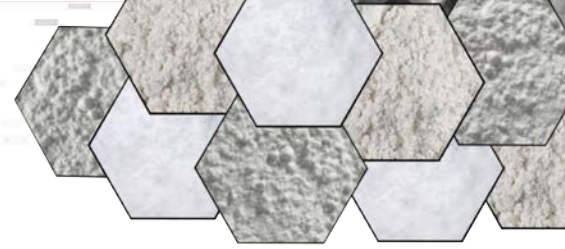


### DESCRIPTION

*Standard Activated Alumina Powder* is manufactured for water adsorption and filtration applications by adsorbing impurities from the surrounding environment. Activated alumina powder can be used in a wide range of applications including the production of chemicals, pharmaceuticals, and in static or dynamic dehydration applications. This activated alumina offers a high adsorption capacity for both static and dynamic adsorption processes.

- used in dehydration or filtration applications
- capable of dehydrating surrounding environment
- ideal for the production of chemicals and pharmaceuticals
- offers advantageous adsorption capacity in static and dynamic applications

### CHEMICAL FORMULA



### SPECIFICATIONS

Activated Alumina			
Standard Activated Alumina Powder			
Property	Unit	Powder	
Particle Size	µm	8.0 - 13.0	
Specific Surface Area	m <sup>2</sup> /g	≥240	
Loss on Ignition 0-300°C (32-570°F)	wt%	≤10.0	
300-1,000°C (570-1,835°F)	wt%	≤8.0	
Packaging Options	25kg (55.1lb) / Bag		

### INDUSTRIES USED

chemical production  
pharmaceutical production

static applications  
dehydration

desiccant drying  
water purification

### STORAGE

As an adsorbent, activated alumina should not be left exposed to open air and should be stored in dry conditions with air-proof packaging.

## CONNECT WITH US...

### Hengye Inc.

11999 Katy Frwy, Suite 588

Houston, Texas 77079

Office (832) 288-4288

Fax (832) 288-4230

info@hengyeinc.com



# HENGYE



ISO 9001:2008



ISO 14001:2004